


BLAZE T



Specifications

- Aluminium housing
- White, grey, black antimicrobial electrostatic powder coated
- Impact resistant IK08
- Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
- Other wattages and heights available
- IP66
- CRI 80
- 5 Year Warranty

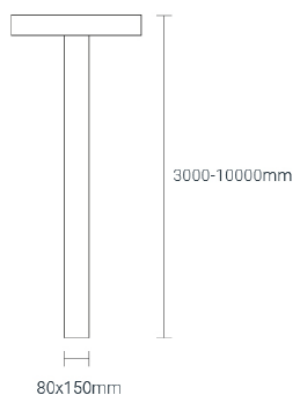

CODE	DIMENSIONS	WATTAGE	LUMEN OUTPUT	LUMEN PER WATT	CRI	COLOUR TEMPERATURE
BLAZE-T-30W	80 x 150 x 3000 mm	30W	3600	120+	80+	3000K-6000K
BLAZE-T-60W	80 x 150 x 3000 mm	60W	7200	120+	80+	3000K-6000K
BLAZE-T-80W	80 x 150 x 4000 mm	80W	9600	120+	80+	3000K-6000K
BLAZE-T-100W	80 x 150 x 6000 mm	100W	10400	104+	80+	3000K-6000K