



BRAY SURFACE

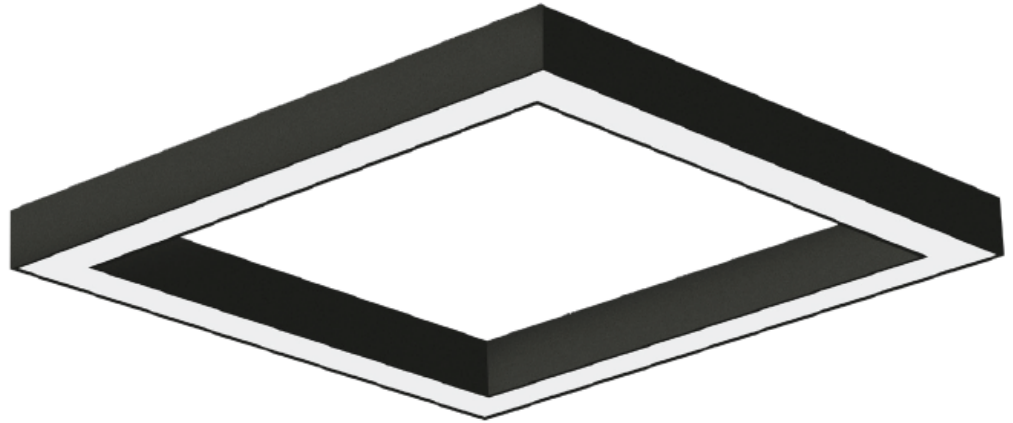

Specifications

- White, grey, black electrostatic powder coated aluminium extrusion housing
- Opal PC diffuser
- Option: Prismatic-Microprismatic diffuser
- Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
- SDCM ≤ 3 (3-step Mac Adam)
- CRI 80
- 5 Year Warranty

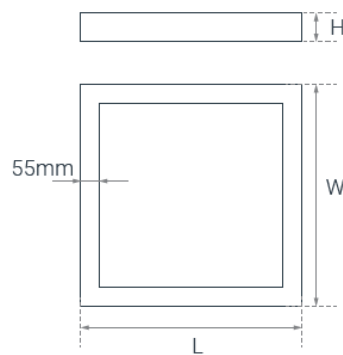

CODE	DIMENSIONS LxWxH mm	WATTAGE	LUMEN OUTPUT	LUMEN PER WATT	CRI	COLOUR TEMPERATURE
BRAY - SUR - 35W	400x400x80 mm	35W	3850LM	110	80	3000K-6500K
BRAY - SUR - 52W	600x600x80 mm	52W	5720LM	110	80	3000K-6500K
BRAY - SUR - 78W	900x900x80 mm	78W	8580LM	110	80	3000K-6500K
BRAY - SUR - 70W	400x1200x80 mm	70W	7700LM	110	80	3000K-6500K
BRAY - SUR - 80W	600x1200x80 mm	80W	8800LM	110	80	3000K-6500K