


BRAY UP & DOWN



Specifications

- White, grey, black electrostatic powder coated aluminium extrusion housing
- Opal PC diffuser
- Option: Prismatic-Microprismatic diffuser
- Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
- SDCM ≤ 3 (3-step Mac Adam)
- CRI 80
- 5 Year Warranty

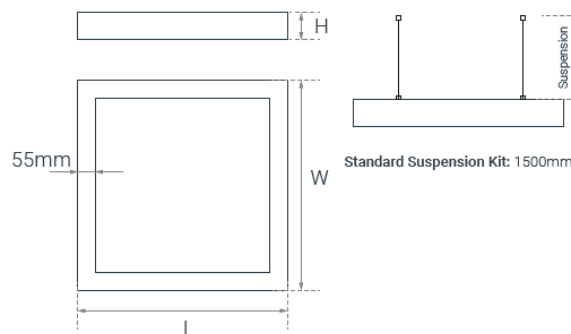

CODE	DIMENSIONS LxWxH mm	WATTAGE	LUMEN OUTPUT	LUMEN PER WATT	CRI	COLOUR TEMPERATURE
BRAY - UD - 35W	400x400x80 mm	35(Down) - 10(Up)	3850(Down) - 1100(Up)	110	80	3000K-6500K
BRAY - UD - 52W	600x600x80 mm	52(Down) - 15(Up)	5720(Down) - 1650(Up)	110	80	3000K-6500K
BRAY - UD - 78W	900x900x80 mm	78(Down) - 23(Up)	8580(Down) - 2530(Up)	110	80	3000K-6500K
BRAY - UD - 70W	400x1200x80 mm	70(Down) - 23(Up)	7700(Down) - 2530(Up)	110	80	3000K-6500K
BRAY - UD - 80W	600x1200x80 mm	80(Down) - 25(Up)	8800(Down) - 2750(Up)	110	80	3000K-6500K