


FLYNN - UP & DOWN



Specifications

- White, grey, black colour anti bacterial electrostatic powder coated aluminium injection housing
- Tempered glass diffuser
- Double layer polyester powder paint resistant to corrosion and salt spray fog
- Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
- SDCM ≤ 3 (3-step Mac Adam)
- IP65
- CRI >80
- 5 year Warranty

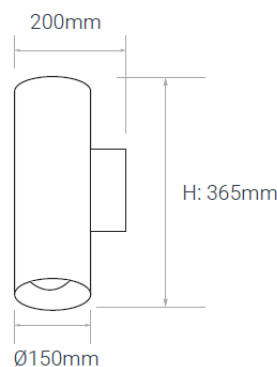

CODE	DIMENSIONS ØxH (mm)	WATTAGE	LUMEN OUTPUT	LUMEN PER WATT	CRI	COLOUR TEMPERATURE
FLYNN-UD-10W	150 x 365mm	10(Down) - 10(Up)	2600	130	80+	3000K-6500K
FLYNN-UD-20W	150 x 365mm	20(Down) - 20(Up)	5200	130	80+	3000K-6500K