


LEO - 1200x300 Panel**Specifications**

- White, grey, black colour antimicrobial powder coated steel sheet housing
- Available in recessed, surface and suspended
- Opal diffuser
- Prismatic & Microprismatic diffuser options
- Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
- SDCM ≤ 3 (3-step Mac Adam)
- IP20/IP44
- CRI 80
- 5 year Warranty

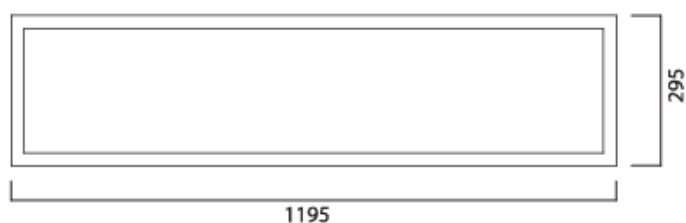

CODE	DIMENSIONS L x W x H (mm)	WATT	LUMEN OUTPUT	LUMEN PER WATT	CRI	COLOUR TEMP
LEO-25W	295x1195x65mm	25W	2750	110	80	3000K/4000K
LEO-38W	295x1195x65mm	38W	4370	115	80	3000K/4000K