


LINA55 - UP & DOWN



Specifications

- White, grey, black electrostatic powder coated aluminium extrusion housing
- Opal PC diffuser
- Option: Prismatic-Microprismatic diffuser
- Other lengths and wattages available on request
- Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
- SDCM ≤ 3 (3-step Mac Adam)
- CRI 80
- 5 year Warranty

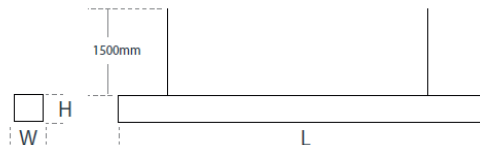

CODE	DIMENSIONS W x L x H mm	WATTAGE	LUMEN OUTPUT	LUMEN PER WATT	CRI	COLOUR TEMPERATURE
LINA-UD-29W-600	600 x 55 x 79mm	17(Down) - 12(Up)	1870(Down) - 1320(Up)	110	80+	3000K-6500K
LINA-UD-39W-900	900 x 55 x 79mm	21(Down) - 18(Up)	2310(Down) - 1980(Up)	110	80+	3000K-6500K
LINA-UD-46W-900	900 x 55 x 79mm	28(Down) - 18(Up)	3080(Down) - 1980(Up)	110	80+	3000K-6500K
LINA-UD-45W-1200	1200 x 55 x 79mm	30(Down) - 15(Up)	3300(Down) - 1650(Up)	110	80+	3000K-6500K
LINA-UD-55W-1200	1200 x 55 x 79mm	35(Down) - 20(Up)	3850(Down) - 2200(Up)	110	80+	3000K-6500K
LINA-UD-80W-1500	1500 x 55 x 79mm	50(Down) - 30(Up)	5500(Down) - 3300(Up)	110	80+	3000K-6500K