



STELO - suspended

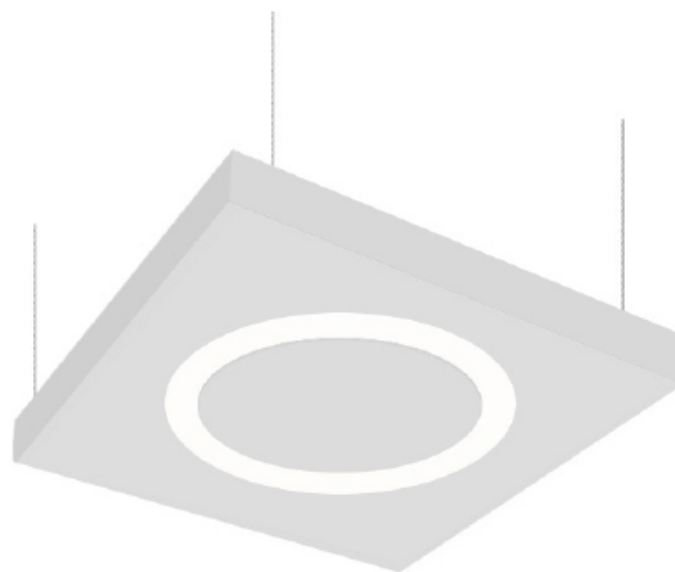

Specifications

- White, grey, black antimicrobial powder coated steel sheet housing
- Opal diffuser
- Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
- SDCM ≤ 3 (3-step Mac Adam)
- IP44
- CRI 80
- 5 year Warranty



W: 300/600/750mm L: 300/600/750mm H: 65mm

CODE	DIMENSIONS L1 x L2 x H (mm)	WATTAGE	LUMEN OUTPUT	LUMEN PER WATT	CRI	COLOUR TEMP
STELO-SUS-22W	600x600x65mm	22W	1985	90+	80	3000K-6500K
STELO-SUS-38W	600x600x65mm	38W	3422	90+	80	3000K-6500K
STELO-SUS-45W	600x600x65mm	45W	4054	90+	80	3000K-6500K